

Introduction:

GP Series RFID readers are high performance proximity readers featuring long range and small dimensions. The readers run from any voltage from 5 to 12.5V DC and feature high read range at as low as 5 volts making it ideally suited to a wide variety of applications, particularly access control. The same basic unit can be configured to output most of the common interface formats, including Wiegand, Magstripe, Clock / Data and RS232 serial ASCII output, making it easy to upgrade existing installations.

Features:

- ☆ **Wide Voltage range**
- ☆ **Potted for environmental protection**
- ☆ **Externally programmable interface**
- Weather resistant

Ordering information:

- GP8 – Small reader module for OEM applications
- GP20 – Up to 20 cm read range, wall-mounting
- GP30 – Up to 30 cm read range, wall-mounting
- GP60A – Up to 60 cm read range, wall-mounting
- GP90A – Up to 90 cm read range, wall-mounting


Specifications:

| | |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Requirements | 5 ~ 12.5 V DC regulated, linear |
| Interfaces | Wiegand, MSR ABA Track2 or RS232 |
| Read Range | <ul style="list-style-type: none"> ➢ GP8: Up to 7 cm without external antenna with ISO card; up to 30 cm with proper external antenna ➢ GP20: Up to 13 cm at 5V with ISO card; up to 20 cm at 12.5V ➢ GP30: Up to 20 cm at 5V with ISO card; up to 30 cm at 12.5V |
| Frequency | 125KHz, ASK |
| Format | 64 bits, Manchester coding |
| Transponder | Read only |
| Dimensions | GP8 – 41 x 24 x 10 mm GP20 – 78 x 43 x 15 mm GP30 – 104 x 63 x 20 mm |
| Temperature Range | Readers: -25 ~ 65°C Transponders: -55 ~ 80°C |

Ordering information for Transponders:

- CFR01 – 86 x 55 x 0.8 mm ISO card
- CFR03 – 86 x 55 x 2 mm Clamshell card
- TAG52 – Disc with diameter 52 mm, 8 mm thickness
- TAG50 – Disc with diameter 50 mm, 2 mm thickness
- TAG25 – Disc with diameter 25 mm, 4 mm thickness
- TAG22 – Disc with diameter 22 mm, 4 mm thickness
- TAG25K – Key chain, W31 x H41 x D5 mm
- TAG20K – Tear drop key chain W30 x H45.2 x D5.1mm

※ Specification is subject to change without notice.

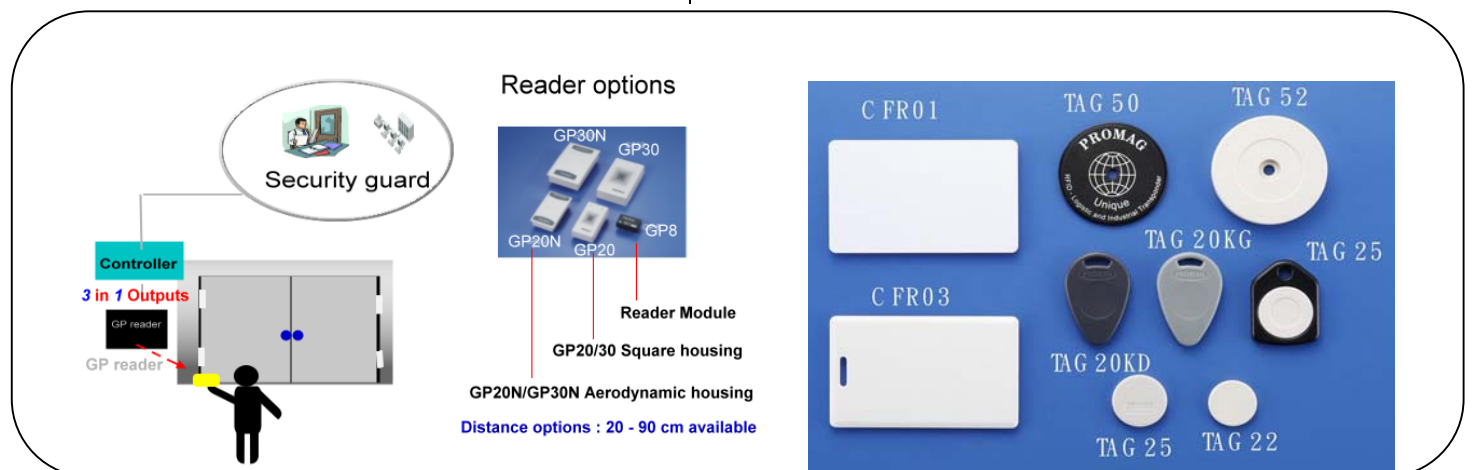

We welcome OEM inquiries

- ◆ Custom design manufacturing is available
- ◆ Custom device programming is available
- ◆ Call factory for other configuration



8F.,NO.31, LANE 169, KANG-NING
STREET,HSI-CHIH,TAIPEI,TAIWAN

TEL: 886-2-26954214

FAX: 886-2-26954213

e-mail: promag@ms24.hinet.net

gigatms@ms3.hinet.net

http://www.gigatms.com.tw