



Overview

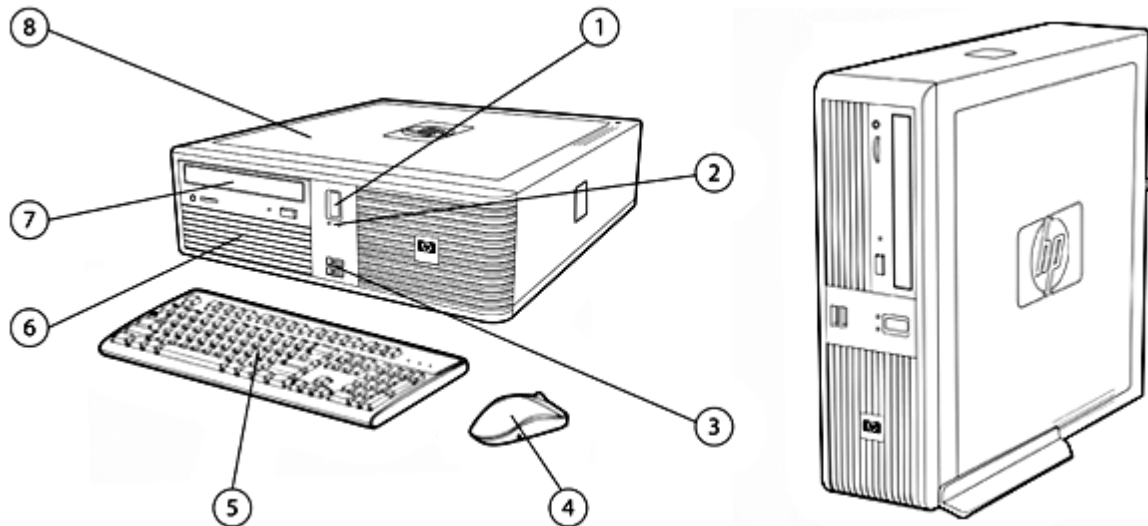

- 1. Recessed power button
- 2. LEDs
- 3. 2 USB 2.0 ports with rubber cover
- 4. 2-button scroll mouse
- 5. Keyboard
- 6. Internal hard drive
- 7. External optical drive
- 8. Second internal hard drive

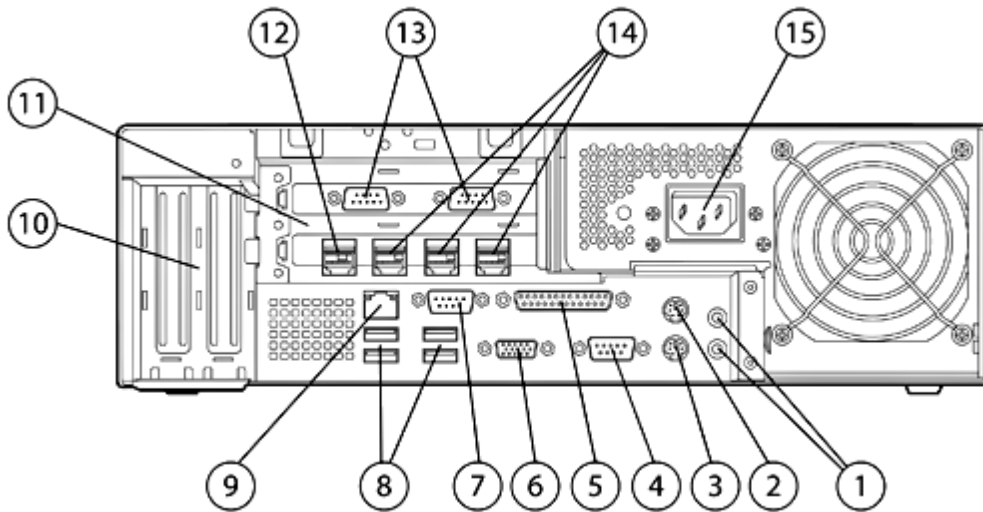

- 1. Line in and line out audio jacks
- 2. PS/2 mouse port
- 3. PS/2 keyboard port
- 4. RS232 serial COM1 port
- 5. Parallel port
- 6. VGA port
- 7. RS232 serial COM2 port
- 8. 4 USB 2.0 ports
- 9. RJ-45 LAN jack
- 10. 2 half-height slots: left ADD2/SDVO slot, right PCIe-x1
- 11. 2 full-height PCI slots
- 12. 1 USB 2.0, USB + PWR port: +24V (some models)
- 13. 2 RS232 serial COM3 and 4 ports (some models)
- 14. 3 USB 2.0, USB + PWR ports: +12V (some models)
- 15. 240-W power supply (no line switching required)

Overview

At A Glance


- Intel® Core™ 2 Duo processor, Intel Pentium® Dual-Core processor, or Intel Celeron® processor
- One of the following operating systems:
 - Genuine Windows® XP Professional
 - Genuine Windows Vista Business 32 edition
 - Genuine Windows Embedded for Point of Service (WEPOS)
 - FreeDOS
- Intel Q963 chipset with Intel GMA 3000 and support for dual independent displays
- Dual Channel, PC2-5300, DDR2 system memory
- Integrated Broadcom 5755 NIC 10/100/1000 with integrated TPM support
- SMART III serial ATA 3.0Gb/s Hard Drives
- RAID level 0, 1, and 10 support
- Manageability tools
- Energy Star and Blue Angel compliance with energy-saving features
- Protected by HP Services, including a 3-3-3, standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

NOTE: All models and features may not be available in all countries.

Standard and Configurable Components

Model Key and Example

NOTE: This diagram is an example that illustrates how to read the model number. It is not intended to give every available configuration choice specified in the body of this document and may include references to modules that are out of date and no longer available.

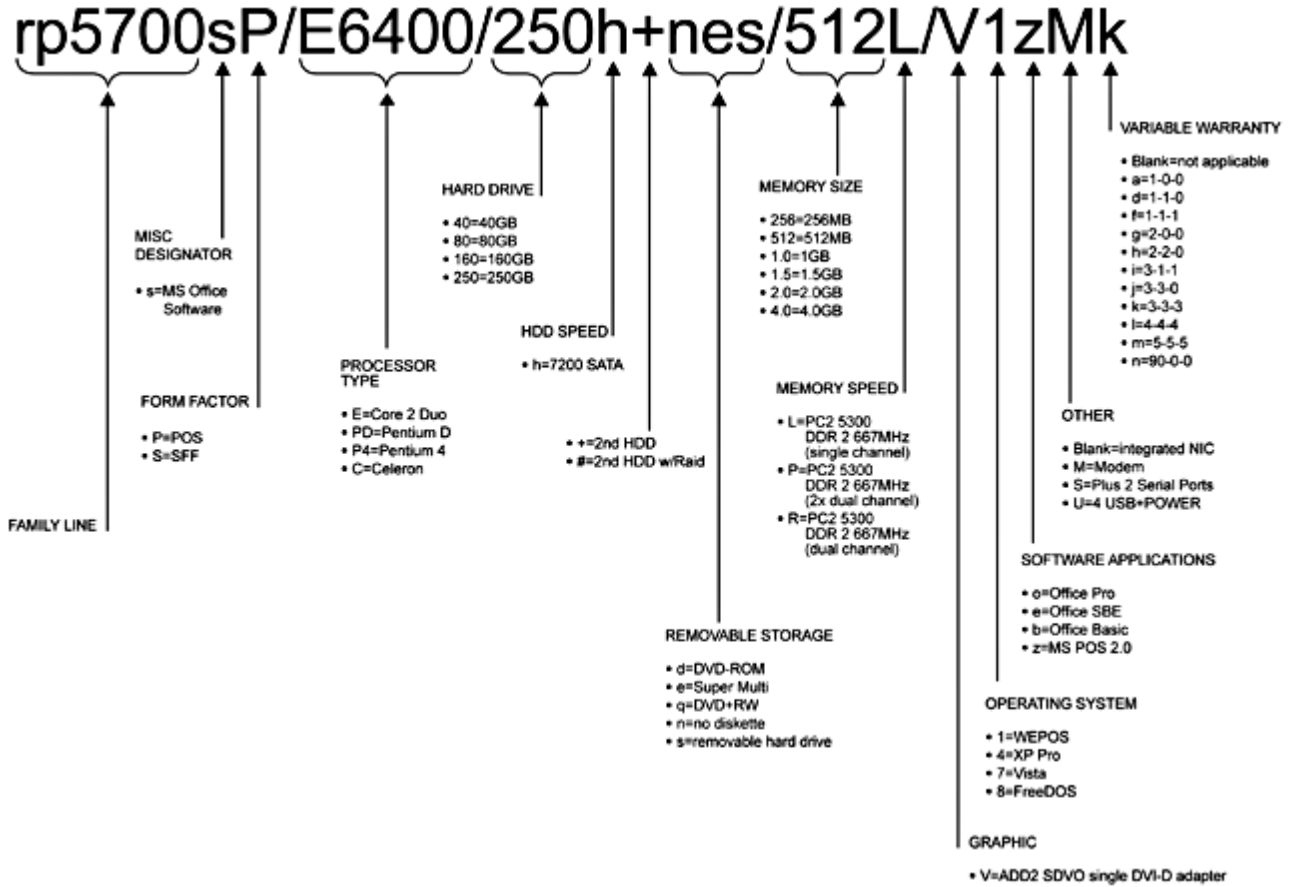

Operating System –
One of the following

Genuine Windows XP Professional SP2
Genuine Windows Vista Business 32 edition
Genuine Windows Embedded for Point of Service (WEPOS)
FreeDOS

Standard and Configurable Components

<p>Value-added Software (not included with FreeDOS) Not all software included with all models.</p>	<p>HP ProtectTools Security Software Suite* HP Client Management Solutions (visit http://www.hp.com/go/easydeploy) HP Backup and Recovery Manager HP Insight Diagnostics Computer Setup Utility Symantec AntiVirus with 60 day Live Update Subscription Intervideo WinDVD (supplied with DVD drive)</p>	<p>Microsoft Office 2007 Basic* Microsoft Office 2007 Professional* Microsoft Office 2007 Small Business* Microsoft Internet Explorer HP Open View Radia Management Agent Altiris Deployment Solution Agent SoftThinks Roxio Easy Media Creator (included with DVD drives) Sun Java Runtime Environment Vista Easy Setup Microsoft Dynamics – Point of Sale 2.0*</p>
---------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

* Sold separately.

<p>Value-added Services and Features</p>	<p>HP Stable Platform Program with Product Change Notification Business-to-Business Portals</p>	<p>Factory Express Deployment and Lifecycle Services (sold separately) TPM 1.2* Vista Bit-Locker Ready</p>
-------------------------------------------------	-----------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------

* TPM module disabled where use is restricted by law; for example, Russia.

<p>Service and Support</p>	<p>On-site Warranty and Service NOTE 1 This three-year, limited warranty and service offering delivers three years of on-site, next business-day NOTE 2 service for parts and labor and includes free telephone support NOTE 3 24 x 7. Global coverage NOTE 2 ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. The rp5700 is available for sale in the Americas and EMEA only</p> <p>NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country. NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.</p>
-----------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p>Dimensions and Weight</p>	<p>Chassis Dimensions (HxWxD) 3.94 x 13.4 x 15 in (10 x 34 x 38 cm)</p> <p>System weight* 19.62 lb (8.9 kg) POS models, 18.64 lb (8.433 kg) PC models</p> <p>System volume approximately 13 liters (13.74 quarts)</p> <p>Shipping weight* 27.3 lb (12.355 kg) POS models, 26.52 lb (11.998 kg) PC models</p> <p>Shipping box dimensions 23.38 x 19.68 x 9.00 inches (59.38 x 49.99 x 22.85 cm)</p> <p>Monitor weight supported 77 lb (35 kg) maximum</p> <p>* Configured with 2 hard drives, 1 optical drive, no diskette drive, USB and COM cards (POS models), and tower stand.</p>
-------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p>Power Supply</p>	<p>240W Custom Power Supply Active PFC. No line switching required.</p>
----------------------------	-------------------------------------------------------------------------

Standard and Configurable Components

Ports	USB	6 USB 2.0 (2 front, 4 rear) Plus 4 additional USB+POWER on some models; 3 @ 12V, 1 @ 24V
	Serial	2 RS232 individually configurable to power 5V & 12 V. COM1 can be configured for 5V, 9V, and 12V Plus 2 additional RS232 on some models via PCI card. Individually configurable to power 5V and 12V
	Parallel	1
	PS/2	2
	Video	1
	Audio	2, line in and line out
	NIC	RJ-45
	Support for Multi-Monitor*	available via HP ADD2 SDVO DVI-D Adapter

* The rp5700 supports normal (or non-reversed) layout (Advanced Digital Display 2) adapter cards inserted into the SDVO (Serial Digital Video Output) connector on the system board. This connector has the physical appearance of a PCIe- x16 connector; however, conventional PCIe cards are not supported in this connector.

Chipset	Intel Q963 with ICH8-RAID
----------------	---------------------------

Processor and Speed* One of the following	Intel Core2 Duo Processor E6400e (2.13-GHz, 2-MB L2 cache, 1066-MHz FSB)
	Intel Pentium Dual-Core Processor E2160 (1.80-GHz, 1-MB L2 cache, 800-MHz FSB)
	Intel Celeron Processor 440 (2-GHz, 512-KB L2 cache, 800-MHz FSB)

* Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families.

Memory	DDR2 SYNCH DRAM NON-ECC MEMORY Memory upgrades are accomplished by adding single or multiple DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations. The Intel Q963 Express chipsets support non-ECC DDR2 PC2-5300 (667-MHz)
---------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

HP recommends dual-channel symmetric configurations for maximum performance.

For best performance, add the same amount of total memory to each channel and do not mix speeds. For dual-channel symmetric performance, the total amount of memory in each channel must be equal. If speeds are mixed, speed will default to the slowest DIMM.

512-MB DDR2 Synch DRAM PC2-5300 (667-MHz) Non ECC (1 x 512 MB)

512-MB DDR2 Synch DRAM PC2-5300 (667-MHz) Non ECC (2 x 256 MB)

1-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non ECC (1 x 1 GB)

1-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non ECC (2 x 512 MB)

2-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non ECC (1 x 2 GB)

2-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non ECC (2 x 1 GB)

3-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non ECC (3 x 1 GB)

4-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non ECC (4 x 1 GB)

Standard and Configurable Components

Maximum Memory Supports up to 4 GB of DDR2 Synch DRAM.
Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.
NOTE: Above 3-GB, all memory may not be available due to system resource requirements.


DIMM Size	Slot			
	Channel A		Channel B	
	1 (black)	2 (white)	3 (black)	4 (white)
512 MB	512 MB			
1 GB	1 GB			
1 GB	512 MB		512 MB	
2 GB	1 GB		1 GB	
2 GB	2 GB			
2 GB	512 MB	512 MB	512 MB	512 MB
3 GB	1 GB		2 GB	
3 GB	2 GB		1 GB	
4 GB	1 GB	1 GB	1 GB	1 GB

Slots PCI 2 full-height, half-length PCI, 1 half-height PCIe-1x
SDVO/ADD2 1

Storage

- Internal bays** 2 3.5-inch ATA hard drive
- External bay** 1 5.25-inch optical drive
- Hard Drive Interfaces Supported** 2 Serial ATA interfaces with RAID controller option. Supports RAID 0, 1, and 10.
- Hard Drive Controller Supported** SATA 3.0 Gb/s and 1.5 Gb/s
- Serial-ATA connectors** 3
- Hard Drive –** 80-GB, 160-GB, 250-GB SATA 3.0 Gb/s, 7200 rpm
- One of the following 80-GB, 160-GB, 250-GB SATA 3.0 Gb/s, 7200 rpm with RAID 1
- Removable Storage –** 16X/48X SATA DVD-ROM
- One of the following 16X SATA SuperMulti LightScribe Drive

Standard and Configurable Components

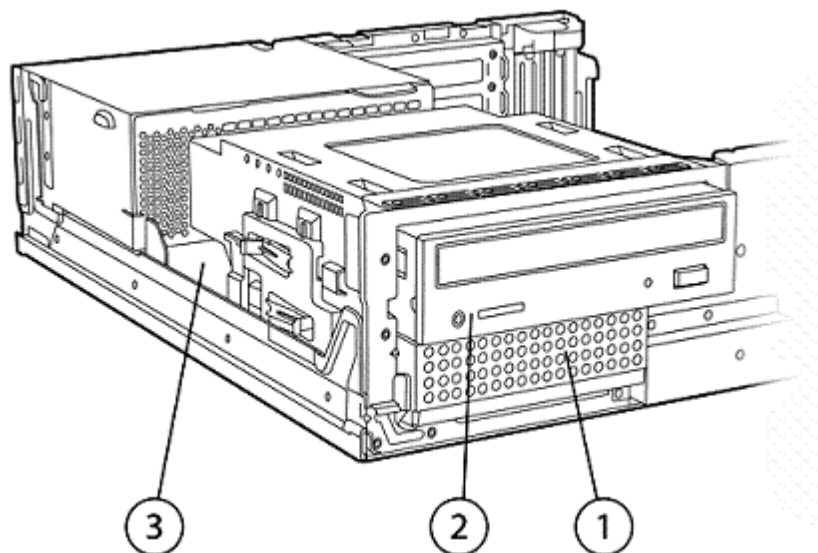

Front View	Quantity Supported	Position	Controller
Diskette Drives	0	0	N/A
3.5-inch Serial ATA Hard Drive	3	1, 2*, 3	SATA
Optical Drive Bay or Carrier for Hard Drive	1	2	SATA

* Requires optional Hard Drive Carrier

Security	<p>TPM 1.2 Embedded Security Chip* integrated with Broadcom NIC</p> <p>HP ProtectTools Security Software Suite with BIOS Configuration (serial, parallel, USB enable/disable), Credential Manager, Smart Card Manager (sold separately)</p> <p>HP Desktop Security Lock Kit (lock and cable) (sold separately)</p> <p>Security cable with Kensington lock (sold separately)</p> <p>Wall Mount/Security Sleeve (sold separately)</p> <p>Security loop hole diameter 0.212 inch (0.538 cm)</p> <p>*NOTE: TPM module disabled where use is restricted by law; for example, Russia.</p>
-----------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

NIC	Broadcom 5755 10/100/1000 NIC with TPM 1.2 support
------------	----------------------------------------------------

Communications	<p>HP Wireless A+G PCI Adapter Card (optional)</p> <p>2006 Agere PCI 56K International SoftModem (optional)</p>
-----------------------	-----------------------------------------------------------------------------------------------------------------

Graphics	Integrated Intel Graphics Media Accelerator 3000. Support for dual display via optional HP ADD2 SDVO DVI-D Adapter
-----------------	--------------------------------------------------------------------------------------------------------------------

Audio	Intel integrated high-definition audio with 2-channel Realtek ALC 262 codec and internal amplified chassis speaker
--------------	--------------------------------------------------------------------------------------------------------------------

Standard and Configurable Components

Input/Output Devices	Keyboard – One of the following	PS/2 keyboard USB BG1650 keyboard (EMEA) USB keyboard No keyboard optional
	Mouse – One of the following	PS/2 scroll mouse USB scroll mouse Optical scroll mouse No mouse optional

Miscellaneous	Tower stand standard
---------------	----------------------

After-Market Options

Communications	HP Wireless A+G PCI Adapter (Americas)	EA118AA
	HP Wireless A+G PCI Adapter (EMEA)	PZ928AA
	Modem RJ11 Telecoms Adapter Kit	DC131C
	2006 Agere PCI 56K International SoftModem	EK694AA
Graphics	HP ADD2 SDVO DVI-D Adapter	DY674A
	DVI to DVI Cable	DC198A
Hard Drives	HP 80-GB SATA 3.0 Gb/s	PY276AA
	HP 160-GB SATA 3.0 Gb/s	PY277AA
	HP 250-GB SATA 3.0 Gb/s	PY278AA
	HP 3.5-inch Removable SATA Hard Drive Carrier (inserts into optical drive bay for non-HP hard drive support)	DS710B
Optical Drives	16X SATA SuperMulti LightScribe Drive	GF343AA
	16X/48X SATA DVD-ROM	AH047AA
Input/Output Devices	HP PS/2 Keyboard	DT527A
	HP USB BG1650 Keyboard (EMEA)	DT529A
	HP USB Keyboard	DT528A
	HP PS/2 2-Button Optical Scroll Mouse	EY703AA
	HP USB Smart Card Keyboard	ED707AA
	HP USB 2- Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
POS Model Options	HP Cash Drawer	EY024AA
	HP USB Barcode Scanner	EY022AA
	HP USB Mini MSR	EY026AA
	HP USB POS Keyboard	EY025AA
	HP USB Receipt Printer	EY023AA
	Microsoft – Point of Sale 2.0	RA693A
Memory (DIMMs)	512-MB DDR2 Synch DRAM PC2-5300 (667-MHz) Non-ECC	PX975AA
	1-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non-ECC	PX976AA
	2-GB DDR2 Synch DRAM PC2-5300 (667-MHz) Non-ECC	PX977AA

After-Market Options

Monitors	HP L1506 15-inch TFT Flat Panel Monitor – Analog only	PX848AA
	HP L1706 17-inch TFT Flat Panel Monitor – Analog only	PX849AA
	HP L1740 17-inch TFT Flat Panel Display – Analog/Digital	PL766AA
	HP L1755 17-inch TFT Flat Panel Display – Analog/Digital	PL777AA
	HP L1906 19-inch TFT Flat Panel Display – Analog only	PX850AA
	HP L1940T 19-inch TFT Flat Panel Display – Analog/Digital	EM869AA
	HP L1955 19-inch TFT Flat Panel Display – Analog/Digital	PD974AA
	HP LP2065 20-inch TFT Flat Panel Display – Analog/Digital	EF227A4
	HP L5006tm 15-inch LCD Touchscreen Monitor	RB146AA
	HP s7540 17-inch (16.0 vis) CRT Monitor	PF997AA
HP v7650 17-inch (16.0 vis) Flat-face CRT Monitor	PF996AA	
Security	Kensington Security Lock Kit	PC766A
	HP Business PC Security Lock Kit	PV606AA
Software	HP ProtectTools (1 user)	RG984AA

Technical Specifications

Unit Environment and Operating Conditions	
General Unit Operating Guidelines	
<ul style="list-style-type: none"> Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range. Leave a 10.2-cm (4-in) clearance on front side and power supply side of the computer to permit the required airflow. If within an enclosure, the front side should be 100% open. The clearance between the system and the cabinet must be at least 10 mm (0.4 inch) on the sides and top and at least 50-mm (2-inch) clearance in the rear with power supply venting area 100% open per the above bullet. Never restrict airflow into the computer by blocking any vents or air intakes. Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air. Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow. 	
Temperature Range	Operating: 50° to 104 F (10° to 40° C)* Non-operating: -22° to 140° F (-30° to 60° C)
Relative Humidity	Operating: 20% to 85% (non-condensing at ambient) Non-operating: 5% to 90% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)
<p>*NOTE: Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.</p>	

Power Supply	240-watt – 80Plus* power supply – Active PFC *This alternate 80% efficient power supply is a requirement for US Energy Star 4.0 compliance in conjunction with a select range of processors and modules.
Operating Voltage Range	90 to 264 VAC
Rated Voltage Range	100 to 240VAC
Rated Line Frequency	50/60 Hz
Operating Line Frequency Range	47 – 63 Hz
Rated Input Current	5 A @ 90 VAC (3.5 A @ 90 VAC with 80% efficient power supply*)
Heat Dissipation	Standard power supply: Typical 340 btu/hr (86 kg-cal/hr) Maximum 1260 btu/hr (397 kg-cal/hr) 80% efficient power supply: Typical 273 btu/hr (69 kg-cal/hr) Maximum 1024 btu/hr (258 kg-cal/hr)
Power Supply Fan	80 mm variable speed fan
Energy Star 3.0 Compliant	Yes
Energy Star 4.0 Compliant	Yes
Blue Angel Compliant (<5w in S5-- Power Off)	Yes (except with the HP 16X SATA SuperMulti LightScribe Drive)
FEMP Standby Power Compliant (<2W in S5 – Power Off)**	Yes
Power Consumption in ES Mode - Suspend to RAM (S3) (Instantly Available PC)	< 3 W
Processor/Cache Memory Power - Down (S3)	< 3 W

Technical Specifications

Optical Drive Spins Down When Not In Use	TBD
Environmental and Mechanical Engineering Support Center (EMESC) - Intranet Web Site only	http://env-webserver.ccm.cpqcorp.net/EMESC/default.htm

NOTES:

* This 80% efficient power supply is a requirement for US Energy Star 4.0 compliance in conjunction with a select range of processors and modules.

** Power consumption in the Off/Apparent Off mode is measured and reported with the network interface controller "Wake on LAN" feature disabled in F10 Setup (default is "enabled").

ROM BIOS Information

Key features of the HP BIOS in the rp5700 include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP Business desktop computer into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Security – HP BIOS offers a robust and flexible set of security features to help the system administrator secure their systems from removal of sensitive data, and help prevent access by unauthorized users, subversion of OS security policies, removal of hardware, flash of rogue BIOS images, and attacks on BIOS settings.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies to assist in operating the HP Business Desktop computer in any enterprise environment.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (Flashlite), BIOS updates from within Windows (HPQFlash, SSM), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.

Additional HP BIOS Features

- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. Provides power conservation features under Windows XP.
- Ability to disable the internal speaker

Other Features	Description
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> • Allows the system to wake from a low power mode. • Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
SMBIOS Ver. 2.4	System Management BIOS, previously known as DMI BIOS, for system management information
Wired for Management Support	Intel-driven, industry-wide initiative to make Intel architecture-based PCs, servers and mobile computers more inherently manageable right out of the box and over the network
Dual-State Power Button	Power button acts as both an on/off button and suspend-to-sleep button

Technical Specifications

Serviceability Features of System		
Dual Color Power LED on Front of Computer (Indicates Normal Operations and Fault Conditions)		
Diagnostic LED Explanation Table	Number of 1-second red LED blinks followed by 2-second pause, then repeats: 2-processor thermal protection activated 3-processor not installed 4-power supply failure 5-memory error 6-video error 7-PCA failure (ROM detected failure prior to video) 8-invalid ROM, bootblock recover mode	
<ul style="list-style-type: none"> System/Emergency ROM 	<ul style="list-style-type: none"> Flash ROM 	<ul style="list-style-type: none"> CMOS Battery Holder for easy Replacement
<ul style="list-style-type: none"> Flash Recovery with Video 	<ul style="list-style-type: none"> 3.3V Aux Power LED on System PCA 	<ul style="list-style-type: none"> Processor ZIF Socket for easy Upgrade
<ul style="list-style-type: none"> Over-Temp Warning on Screen (Requires IM Agents) 	<ul style="list-style-type: none"> Clear Password Jumper 	<ul style="list-style-type: none"> DIMM Connectors for easy Upgrade
<ul style="list-style-type: none"> Restore CD 	<ul style="list-style-type: none"> Clear CMOS Jumper 	<ul style="list-style-type: none"> NIC LEDs (integrated) (Green & Amber)

Serviceability Features of Chassis		
<ul style="list-style-type: none"> Dual Color Power LED – To indicate normal operations and fault conditions 	<ul style="list-style-type: none"> Color coordinated cables and connectors 	<ul style="list-style-type: none"> Tool-less removal of hood power supply, slot cover, hard drive and optical drive
<ul style="list-style-type: none"> Front power switch 	<ul style="list-style-type: none"> System memory can be upgraded without removing any internal components 	

Feature	Description
ASF 2.0 support (Alert Standard Format)	Industry-standard specification for network alerting and remote control in operating system-absent environments
Towerable	Product can be oriented as a tower (in addition to desktop orientation)
Drive Self Tests (DPS)	<ul style="list-style-type: none"> Drive Protection System A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user. Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced. The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures.
DPS Access through F10 Setup during Boot	
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
SMART I – Drive Failure Prediction	<ul style="list-style-type: none"> Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count
SMART II – Off-Line Data Collection	
SMART III – Off-Line Read Scanning with Defect Reallocation	<ul style="list-style-type: none"> By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure


Technical Specifications - Audio

High Definition Audio	Type	Integrated
	High Definition Stereo Codec	Yes – Realtek ALC262 codec
	Audio Jacks	Line-In (64-K ohm Input Impedance) Line-Out * (200 ohms Output Impedance, expects at least a 10-K ohm load)
	NOTE: *Internal speaker amplifier is for internal speaker only. External speakers need to be powered externally.	
	Sampling	8 kHz – 192 kHz
	Wavetable Syntheses (software)	Yes - Uses OS soft wavetable
	Analog Audio	Yes
	Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
	Internal Audio Speaker Power Rating	1.5 W
	Internal Speaker	Yes
	External Speaker Jack (Line-Out)	Yes

Technical Specifications - Communications

Serial Ports


All serial (COM) ports can be custom configured in either standard mode or powered mode. By repositioning the jumpers (provided) on the system board and on the COM port PCI add-in card (some models), each COM power can achieve power on pin 1 or pin 9. The illustration and table below indicate the COM port assignments and voltage supported for each COM port.

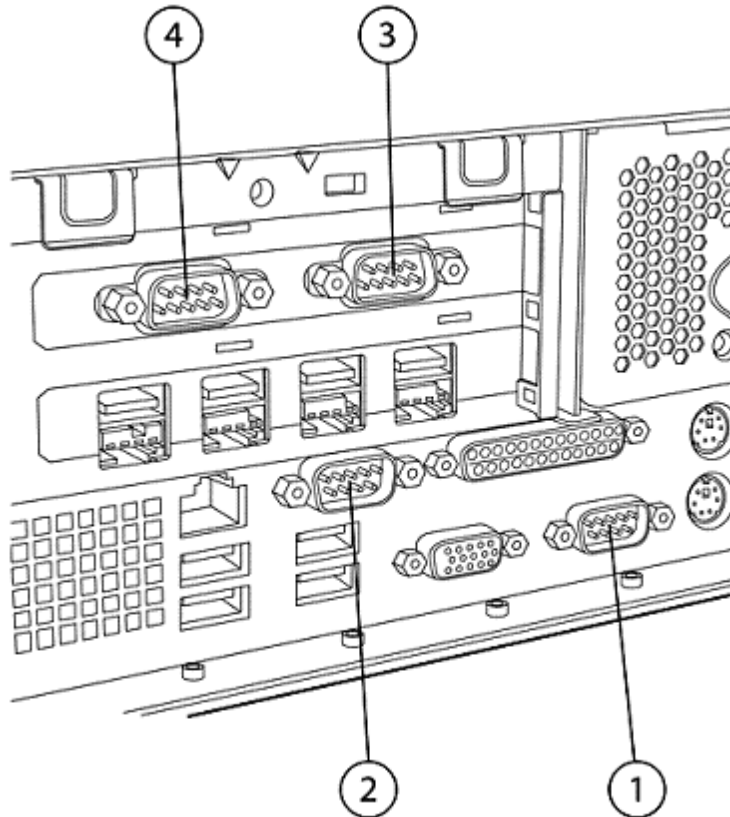

COM port assignment	Description	Standard Mode	+5V	+9V	+12V
1	COM1 (yellow)	Yes	Yes	Yes	Yes
2	COM2	Yes	Yes	No	Yes
3	COM3 (some models)	Yes	Yes	No	Yes
4	COM4 (some models)	Yes	Yes	No	Yes


The following illustrations show how to position the jumpers on the system board and on the COM port PCI add-in card (available on some models) to achieve power on pin 1 or pin 9. P16 and P127 are located on the system board behind the COM1 port.

Technical Specifications - Communications

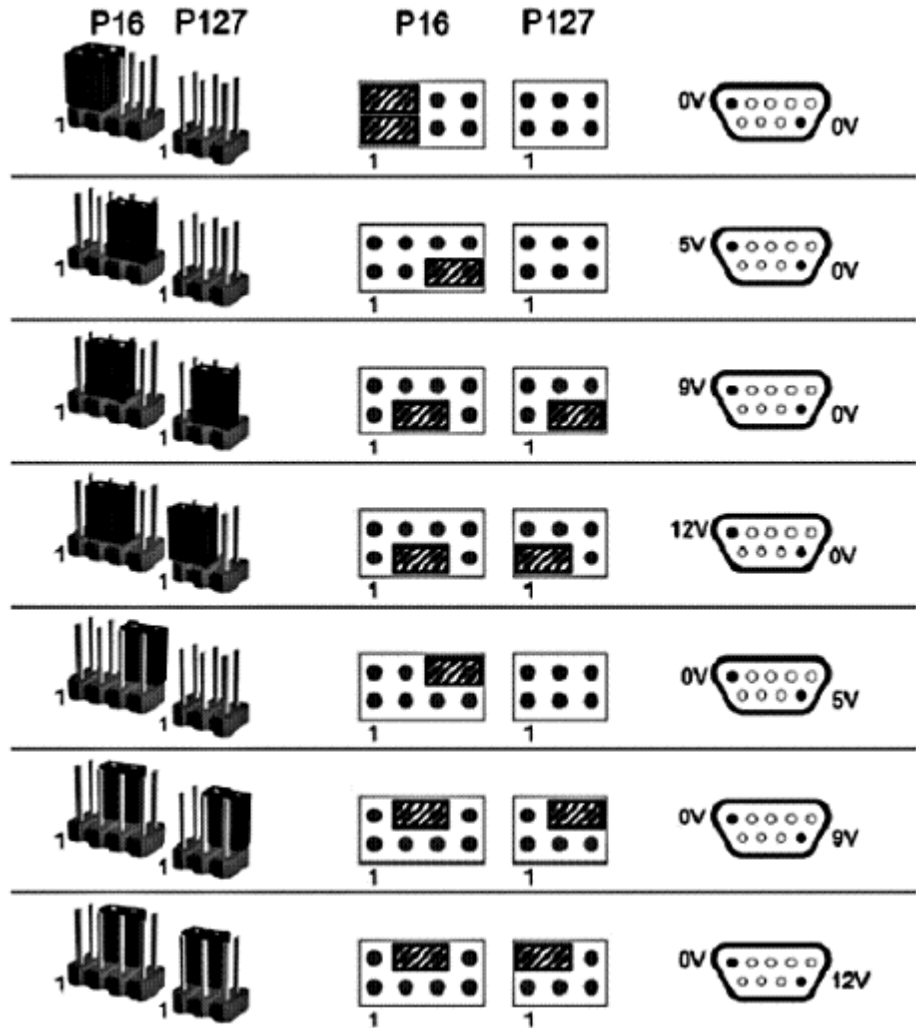

P17 and J4 are located on the optional COM port card

Technical Specifications - Communications

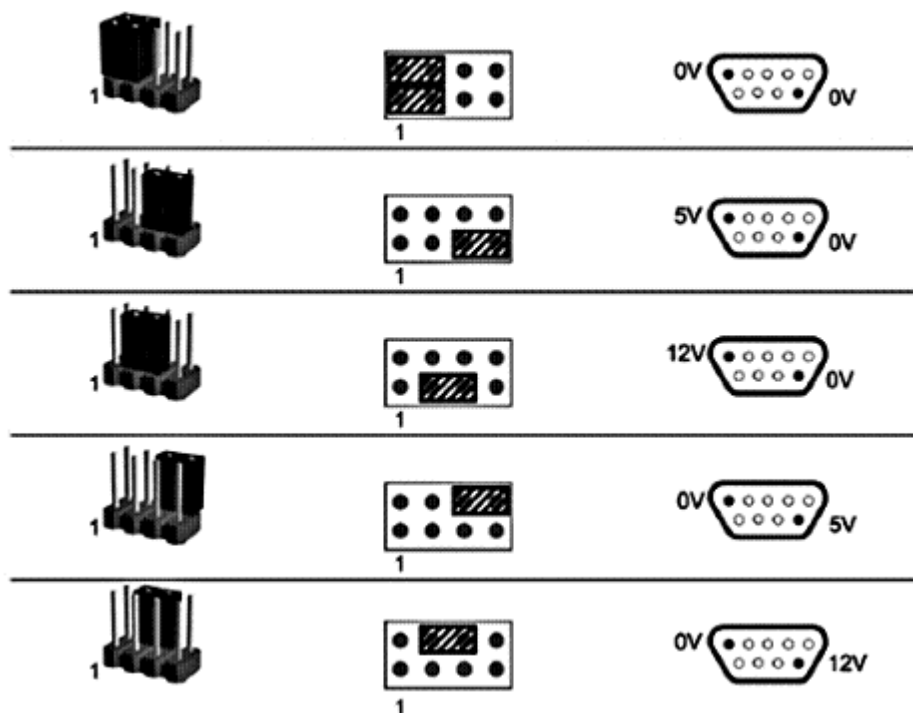

Integrated Broadcom 5755 Gigabit Ethernet

Connector	RJ-45
Controller	Broadcom 5755 PCI-Express LAN Controller
Memory	Integrated 96Kb frame buffer memory
Data rates supported	10/100/1000 Mbps
Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
Bus architecture	PCI-E
Data path width	Single channel, PCI-E
Data transfer mode	Bus-master DMA
Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
Power requirement	1.33 watts @ +3.3V AUX supply with 5V tolerance
Boot ROM support	Yes
Network transfer mode	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)
Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating temperature 32° to 131°F (0° to 55° C) Operating humidity 85% at 131° F (55° C)
Management capabilities	ASF 2.0, ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility

Technical Specifications - Communications

	Alerting	ASF 2.0
2006 Agere PCI 56K International SoftModem	Data Transmission	Technology speeds: 56,000 Kbps maximum downstream data, controllerless NOTE: 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
	Data Speeds	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/ 9,600/7,200/4,800/2,400/1,200/300
	Data Standards	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
	Fax Speeds	14,400/12,000/9,600/7,200/4,800/2,400/1,200/300 b/s
	Fax Mode Capabilities	ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2
	Error Correction and Data Compression	V.44, 42bis, V.42 and MNP2-5
	Power Management	ACPI; PPM1 1.1 and wake support with PME and Vaux; meets PCI 2.3 requirements and PC 2001 requirements
	Upgradeability	Driver upgradeable for future enhancements
	Video	ITU-T V.80 video ready interface
	Other	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
	Operating Temperature	32° to 158° F (0° to 70° C)
	Operating Humidity	20% to 90%, non-condensing
	Power	Requires a 3.3-V auxiliary power rail on PCI bus Uses only one PCI load (i.e., one grant/request pair), one shared IRQ, one electrical load
	Chipset	Agere Systems SV92PL – Integrated PCI interface with 5-V tolerant buffers and CardBus support
	Dimensions (L X H)	Complies with PCI low profile specifications—6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
	Connection	Single RJ-11 connector
	Other Features	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
	Safety	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark)
	EMC	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
	Telecom	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
Other	Bare PCB material compliant to 94V-0 or better (marked as such) PC 2001 compliant, PCI version 2.3, WHQL approved; ACPI compliant	

Technical Specifications - Graphics

<p>Integrated Graphics Media Accelerator 3000</p>	<p>Graphic Controller</p> <p>Bus type</p> <p>RAMDAC</p> <p>Memory</p> <p>Controller clock speed</p> <p>Overlay planes</p> <p>Maximum Color Depth</p> <p>Maximum vertical refresh rate</p> <p>Multi-display Support</p> <p>Graphics/Video API Support</p> <p>Resolutions Supported¹</p>	<p>Integrated GMA 3000</p> <p>Integrated</p> <p>Single 400 MHz integrated</p> <p>UMA with DVMT 4.0 support for frame buffer sizes 8-256 MB</p> <p>667 MHz</p> <p>One 16-bit video overlay plane</p> <p>32 bpp</p> <p>85 Hz</p> <p>One VGA and one DVI-I in conjunction with an ADD2 card, clone and extended desktop modes are enabled by the addition of the HP ADD@ SDVI DVI-I TV-Out Adapter</p> <p>DirectX 9.0c, WGF 1.0, DirectX VA 2.0, Shader Model 3.0, OpenGL 1.5</p>
----------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Resolution	Maximum Refresh Rate (Hz)	
	Analog Monitor	Digital Monitor
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 1024	85	60
1600 x 1200	85	60
1920 x 1080	85	60-R ²
1920 x 1200	85	60-R ²
1920 x 1440	60	N/A

NOTES:

¹ Modes listed are supported with a single active display. The supported mode list for multiple active displays is a subset of this list. Not all modes will support video playback and some supported modes may use software MC (motion compensation) rather than hardware MC. Not all modes will support 3D acceleration depending on the system configuration (e.g., resolution selected, size of frame buffer, number of installed memory modules, etc.).

² -R denotes reduced blanking timings (some digital monitors may not support reduced blanking timings).

Other resolutions and refresh rates may be selectable but are not recommended.

Technical Specifications - Graphics

ADD2 SDVO DVI-I/TV-Out Adapter	Form Factor	Low-profile card (full-height (ATX) and low-profile brackets included in kit)																																						
	Dual head support	Yes																																						
Host Interface Connector		<ul style="list-style-type: none"> • Mechanically compliant with PCI-e standard • Complies with the Intel ADD2 and Intel Serial Digital Video Output (SDVO) specifications 																																						
		Dot Clock	165 MHz maximum																																					
Display Modes	Supports display modes that require up to 165-MHz bandwidth on the link, as shown in the following table.																																							
Resolutions Supported	<table border="1"> <thead> <tr> <th>Resolutions</th> <th>60-Hz LCD</th> <th>60-Hz</th> <th>75-Hz</th> <th>85-Hz</th> </tr> </thead> <tbody> <tr> <td>Blanking</td> <td>5% reduced</td> <td>GTF</td> <td>GTF</td> <td>GTF</td> </tr> <tr> <td>640 x 480 VGA</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>800 x 600 SVGA</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>1024 x 768 XGA</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>1280 x 1024 SXGA</td> <td>Yes</td> <td>Yes</td> <td>No</td> <td>No</td> </tr> <tr> <td>1600 x 1200 UXGA</td> <td>Yes</td> <td>Yes</td> <td>No</td> <td>No</td> </tr> </tbody> </table>					Resolutions	60-Hz LCD	60-Hz	75-Hz	85-Hz	Blanking	5% reduced	GTF	GTF	GTF	640 x 480 VGA	Yes	Yes	Yes	Yes	800 x 600 SVGA	Yes	Yes	Yes	Yes	1024 x 768 XGA	Yes	Yes	Yes	Yes	1280 x 1024 SXGA	Yes	Yes	No	No	1600 x 1200 UXGA	Yes	Yes	No	No
	Resolutions	60-Hz LCD	60-Hz	75-Hz	85-Hz																																			
	Blanking	5% reduced	GTF	GTF	GTF																																			
	640 x 480 VGA	Yes	Yes	Yes	Yes																																			
	800 x 600 SVGA	Yes	Yes	Yes	Yes																																			
	1024 x 768 XGA	Yes	Yes	Yes	Yes																																			
	1280 x 1024 SXGA	Yes	Yes	No	No																																			
1600 x 1200 UXGA	Yes	Yes	No	No																																				
Color Depth	All modes support 8-bpp, 16-bpp, and 24-bpp color depths (up to 16.7 million colors)																																							

Technical Specifications - Hard Drives

Serial ATA 1.5-Gb/s Hard Drives (7200 rpm)

Capacity	250,059,350,016 bytes	
Height	1 in (2.6 cm)	
Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
Interface	Serial ATA (3.0 Gb/s)	
Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
Buffer	8 MB	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.0 ms
	Average	8.5 ms
	Full-Stroke	18 ms
Rotational Speed	7,200 rpm	
Logical Blocks	488,397,168	
Operating Temperature	41° to 131°F (5° to 55°C)	

160-GB

Capacity	163,928,604,672 bytes	
Height	1 in (2.54 cm)	
Width	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)	
Interface	Serial ATA (3.0 Gb/s)	
Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
Buffer	8 MB	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.9 ms
	Average	9.3 ms
	Full-Stroke	18 ms
Rotational Speed	7,200 rpm	
Logical Blocks	320,173,056	
Operating Temperature	41° to 131°F (5° to 55°C)	

Technical Specifications - Hard Drives

80-GB	Capacity	80,026,361,856 bytes	
	Height	1 in (2.54 cm)	
	Width	Media diameter: 3.5 in (8.9.x cm)	
		Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA (3.0 Gb/s)	
	Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
		Average	9.3 ms
		Full-Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 131°F (5° to 55°C)	

Technical Specifications - Input/Output Devices

USB Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
Electrical		Weight	2 lb (0.9 kg) minimum
		Operating voltage	+ 5VDC \pm 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		System interface	USB Type A plug connector
		ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC 99 – 2001	Functionally compliant
Mechanical		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
Environmental		Microsoft PC 99 – 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	–22° to 140° F (–30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence		
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC		
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS		

Technical Specifications - Input/Output Devices

PS/2 Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
Electrical		Weight	2 lb (0.9 kg) minimum
		Operating voltage	+ 5VDC \pm 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		System interface	PS/2 6-pin mini din connector
		ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC 99 – 2001	Functionally compliant
Mechanical		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
Environmental		Microsoft PC 99 – 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	–22° to 140° F (–30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence		
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC		
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS		

Technical Specifications - Input/Output Devices

USB Standard BG1650 Keyboard (gray)	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)		
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)		
Electrical	Electrical	Weight	2 lb (0.9 kg) minimum		
		Operating voltage	+ 5VDC \pm 5%		
		Power consumption	50-mA maximum (with three LEDs ON)		
		System interface	USB Type A plug connector		
		ESD	CE level 4, 15-kV air discharge		
		EMI – RFI	Conforms to FCC rules for a Class B computing device		
		Mechanical	Mechanical	Microsoft PC 99 – 2001	Functionally compliant
				Languages	38 available
				Keycaps	Low-profile design
				Switch actuation	55-g nominal peak force with tactile feedback
Switch life	20 million keystrokes (using Hasco modified tester)				
Switch type	Contamination-resistant switch membrane				
Environmental	Environmental	Key-leveling mechanisms	For all double-wide and greater-length keys		
		Cable length	6 ft (1.8 m)		
		Microsoft PC 99 – 2001	Mechanically compliant		
		Acoustics	43-dBA maximum sound pressure level		
		Operating temperature	50° to 122° F (10° to 50° C)		
		Non-operating temperature	–22° to 140° F (–30° to 60° C)		
		Operating humidity	10% to 90% (non-condensing at ambient)		
		Non-operating humidity	20% to 80% (non-condensing at ambient)		
		Operating shock	40 g, six surfaces		
		Non-operating shock	80 g, six surfaces		
Approvals	Approvals	Operating vibration	2-g peak acceleration		
		Non-operating vibration	4-g peak acceleration		
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence		
Ergonomic compliance	Ergonomic compliance	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence		
		Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, BG Prufzert Mark		
Ergonomic compliance	Ergonomic compliance	Approvals	ANSI HFS 100, ISO 9241-4, and TUVGS		

Technical Specifications - Input/Output Devices

HP PS/2 Scroll Mouse	Dimensions	1.5 x 2.5 x 4.6 in (3.8 x 6.3 x 11.6 cm)	
	Weight	4.44 oz (126 g)	
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out-of-box)	26 in (66 cm) on carpet, 6-drop sequence
		Drop (out-of-box)	1 m on asphalt tile over concrete, 6-drop sequence
	Electrical	Operating voltage	5 VDC \pm 10%
		Power consumption	15 mA
		System consumption	PS/2 mini-din connector
ESD		CE level 4, 15 kV air discharge	
EMI-RFI		Conforms to FCC rules for a Class B computing device	
Mechanical	Microsoft PC99 – 2001	Functionally compliant	
	Resolution	400 \pm 20% DPI	
	Tracking speed	10 in/s (25.4 cm/s) maximum	
	Acceleration	100 in/s/s (2.54 m/s/s)	
	Switch actuation	65 g nominal peak force	
	Switch life	1,000,000 operations (using Hasco modified tester)	
	Switch type	Low force micro-switches	
	Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s	
	Cable length	6 ft (1.8 m)	
	Microsoft PC99 – 2001	Mechanically compliant	
Scroll wheel	Width	8 mm	
	Diameter	0.99 in (25.2 mm)	
	Maximum rotation speed	30 mm/s	
	Switch type	Light force micro-switch	
	Switch life	1 million operations	
Regulatory approvals	Mechanical life	Minimum 200,000 revolutions	
	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	

Technical Specifications - Input/Output Devices

USB Scroll Mouse	Environmental	Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out-of-box)	26 in (66 cm) on carpet, 6-drop sequence 1 m on asphalt tile over concrete, 6-drop sequence
		Electrical	Operating voltage
Power consumption	15 mA		
System consumption	USB Type-A plug connector		
ESD	CE level 4, 15 kV air discharge		
EMI-RFI	Conforms to FCC rules for a Class B computing device		
Mechanical	Microsoft PC99 – 2001	Functionally compliant	
	Resolution	400 ± 20% DPI	
	Tracking speed	10 in/s maximum	
	Acceleration	100 in/s	
	Switch actuation	65 g nominal peak force	
	Switch life	1,000,000 operations (using Hasco modified tester)	
	Switch type	Low force micro-switches	
	Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s	
	Cable length	6 ft (1.8 m)	
	Microsoft PC99 – 2001	Mechanically compliant	
Scroll wheel	Width	8 mm	
	Diameter	0.99 in (25.2 mm)	
	Maximum rotation speed	30 mm/s	
	Switch type	Light force micro-switch	
	Switch life	1 million operations	
Regulatory approvals	Mechanical life	Minimum 200,000 revolutions	
	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	

USB Optical Scroll Mouse	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	Weight	0.27 lb (0.12 kg)
	Cable length	72.8 in (185 cm)

Technical Specifications - Optical Storage

SATA DVD+/-RW LightScribe Drive	Height	5.25-inch, half-height, tray-load			
	Orientation	Either horizontal or vertical			
	Interface type	SATA/ATAPI			
	Disc capacity	8.5 GB DL or 4.7 GB standard			
	Dimensions (HxWxD)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)			
	Weight (maximum)	2.6 lb (1.2 kg)			
	Write speeds	DVD+R	Up to 16X		
		DVD+RW	Up to 8X		
		DVD+R DL	Up to 8X		
		DVD-R DL	Up to 4X		
		DVD-R	Up to 16X		
		DVD-RW	Up to 6X		
		CD-R	Up to 48X		
		CD-RW	Up to 32X		
		Read speeds	DVD-RAM	Up to 4X	
			DVD+RW, DVD-RW, DVD+R DL, DVD-R DL	Up to 8X	
			DVD-ROM, DVD+R, DVD-R	Up to 16X	
			CD-ROM, CD-R	Up to 48X	
			CD-RW	Up to 32X	
			Access time (typical reads, including settling)	Random	DVD: < 130 ms (typical), CD: < 120 ms (typical)
	Full Stroke	DVD: < 240 ms (seek), CD: < 200 ms (seek)			
	Power	Source	SATA DC power receptacle		
DC Power Requirement		5 VDC \pm 5%-100 mV ripple p-p			
		12 VDC \pm 5%-200 mV ripple p-p			
DC Current		5 VDC (< 1000 mA typical, < 1600 mA maximum)			
	12 VDC (< 600 mA typical, < 1400 mA maximum)				
Environmental conditions (operating - non- condensing)	Temperature	41° to 122° F (5° to 50° C)			
	Relative humidity	10% to 90%			
	Maximum wet bulb temperature	86° F (30° C)			

Technical Specifications - Optical Storage

SATA DVD-ROM Drive	Height	5.25-inch, half-height, tray-load		
	Orientation	Either horizontal or vertical		
	Interface type	SATA/ATAPI		
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)		
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
	Weight (max)	2.6 lb (1.2 kg)		
	Read speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 8X	
		DVD-ROM	Up to 16X	
		DVD-RAM	Up to 4X	
		CD-ROM, CD-R	Up to 48X	
		CD-RW	Up to 32X	
		Removable Storage – Media Compatibility – DVD-ROM	Media (READ ONLY – drive is not write capable) CD-ROM CD-R CD-RW DVD-ROM DVD-ROM DL DVD-RAM DVD+R DVD+R DL DVD+RW DVD-R DVD-RW DVD-R DL	
	Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)	
		Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)	
		Cache Buffer	2 MB (minimum)	
		Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)	
	Power	Source	SATA DC power receptacle	
		DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p	
			12 VDC ± 5%-200 mV ripple p-p	
		DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum)	
	12 VDC (< 600 mA typical, < 1400 mA maximum)			
	Environmental (all conditions non- condensing)	Temperature	41° to 122° F (5° to 50° C)	
Relative Humidity		10% to 90%		
Maximum Wet Bulb Temperature		86° F (30° C)		

Technical Specifications - Environmental Data

Eco-Label Certifications and declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- US Federal Energy Management Program (FEMP)
- Taiwan Green Mark
- China Energy Conservation Program
- IT ECO declaration
- EPEAT Rated – SILVER
- Korea Eco-label
- Japan PC Green label*
- Blue Angel

***NOTE:** This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the rp5700 included

Energy Consumption (in accordance with US Energy Star test method)

	115 VAC, 60 Hz	230 VAC, 50 Hz	100 VAC, 60 Hz
Normal Operation	74.892 W	70.712 W	74.956 W
Sleep (LAN card OS On)	2.8951 W	3.2247 W	2.8715 W
Sleep (LAN card OS Off)	1.8191 W	2.1020 W	1.7759 W
Off (WOL Enable)	2.2498 W	2.5715 W	2.2161 W
Off (WOL Disable)	1.2431 W	1.5295 W	1.2251 W

Heat Dissipation*

	115 VAC, 60 Hz	230 VAC, 50 Hz	100 VAC, 60 Hz
Normal Operation	29.2757 W	25.0957 W	29.3397 W
Sleep (LAN card OS On)	0.7594 W	1.0890 W	0.7358 W
Sleep (LAN card OS Off)	0.5978 W	0.8807 W	0.5546 W
Off (WOL Enable)	0.6218 W	0.9435 W	0.5881 W
Off (WOL Disable)	0.4795 W	0.7659 W	0.4615 W

***NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (L_{Wad} , bels)	Sound Pressure (L_{pAm} , decibels)
Idle	3.6	28.2 dB(A)
Fixed Disk (random writes)	3.8	30.2 dB(A)
Optical Drive (sequential reads)	4.9	44.3 dB(A)

Technical Specifications - Environmental Data

Longevity and Upgrading This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product include:

- Higher endurance capacitors for longer life.
- Higher temperature rated capacitors for longer life and reliability
- Improved gold plating on connectors, ports, and add-in cards for longer life and reliability
- Over current protection using polyfuses for USB, serial, PS/2, and video ports for improved reliability and hardware protection
- On-board thermal sensors for improved reliability and thermal protection
- More stringent thermal and humidity testing inside a special cabinet to simulate a thermally harsh POS environment

Spare parts are available throughout the warranty period and or for up to 5 years after the end of production.

Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater the 5 ppm by weight
- Cadmium greater than 10 ppm by weight
- Lead greater than 15 ppm by weight.

Battery size: CR2032 (coin cell)

Battery type: Lithium/Manganese Dioxide

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Silver level (see <http://www.epeat.net>)
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0% recycled materials (by wt.)
- This product is 89.7% recyclable when properly disposed of at end of life.

Packaging Materials	Corrugated Paper	1407 g
	EPE Foam	290 g
	LDPE Bag	63.5 g
	HIPS Cushion	127.01 g

- The EPE foam packaging material is made from no consumer recycled content.
- The corrugated paper packaging materials contain between 40% to 50% recycled content.

Technical Specifications - Environmental Data

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Technical Specifications - Environmental Data

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit

<http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit

<http://www.windowsvista.com/systemrequirements>.

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Intel and Pentium are U.S. registered trademarks of Intel Corporation. Microsoft and Windows are U. S. registered trademarks of Microsoft Corporation. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.